




47nF, 50V DC, Y5V $\pm 20\%$

P/N \rightarrow PK055E473MBC

1) DIMENSIONS

- ❑ Lead Diameter - 0.508 mm
- ❑ Lead Spacing (LS) - 5.08 mm
- ❑ Diameter (D) - 5.0 mm Max
- ❑ Thickness (T) - 4.0 mm Max

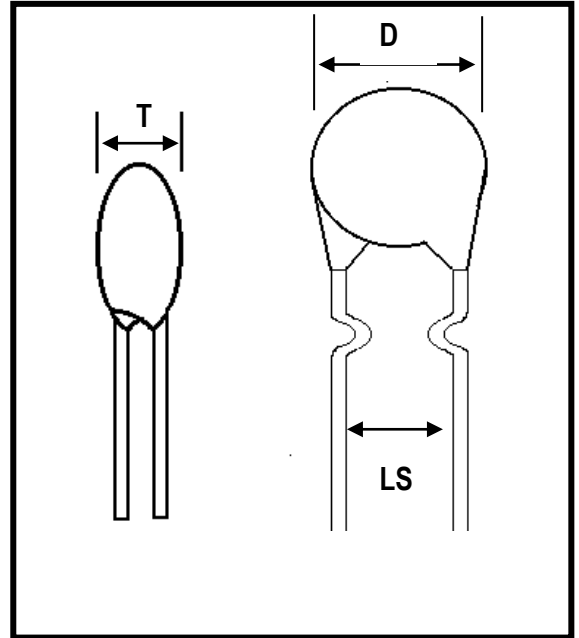

2) Technical Specifications

- ❑ Capacitance - 47 nF
- ❑ Temperature Characteristics - +30% / -80%
- ❑ Tolerance - $\pm 20\%$.
- ❑ Voltage Rating - 50 / 63 V D.C.
- ❑ Dielectric Strength - 1.5 Times of Rated Voltage
- ❑ Dissipation factor - 0.075 Max
- ❑ Test Frequency - 1 KHz, 0.1 VRMS
- ❑ Operating Temp. Range - -30°C to +85°C